

ViewSonic  LCD DISPLAY
VG2756-2K


Key Features

- Integrated USB TypeC and Ethernet
- Daisy chain monitor
- Ergonomic design
- vDisplay Manager software for multitasking
- Lower total cost of ownership



Product Description

The ViewSonic VG56 docking monitor series will keep the workstation tidy and productive with USB Type-C and Ethernet connectivity that turn your monitor into a hub for charging, data, network, and devices. With a 27" display and 2560 X 1440 resolution that delivers larger and clearer images, the VG2756 QHD monitor expands your productivity. This monitor's DisplayPort output also makes it convenient to daisy chain monitors, reducing clutter on your desk and simplifying cable management. A range of ergonomic features such as 40-degree tilt, swivel, bi-directional pivot and height adjustment, along with eye-care technology let you stay comfortable at work all day. In addition, the supported vDisplay Manager software for multi-tasking provides efficient on-screen display control. The monitor and quick release stand ship in an eco-friendly, biodegradable package, thus minimizing total cost of ownership.

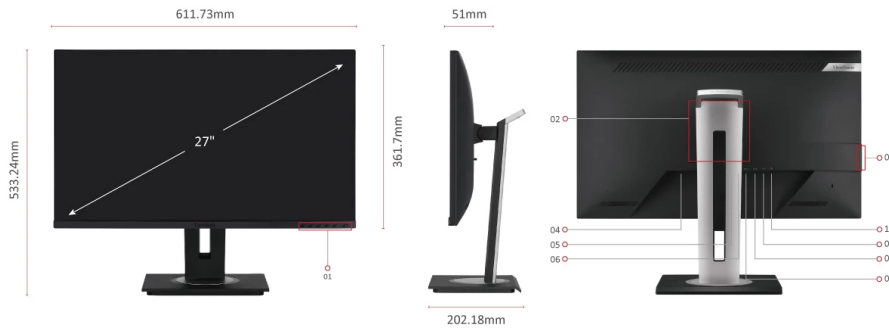

- | | |
|--|------------------|
| 1. Menu Control Panel | 7. USB Type-C |
| 2. VESA Compatible (Wall Mount 100 x 100 mm) | 8. DP out |
| 3. USB Down Stream x 2 | 9. USB up stream |
| 4. AC In | 10. LAN |
| 5. HDMI | |
| 6. DP In | |

Visit Us www.viewsonic.com

DISPLAY

| | |
|------------------------------|---|
| Display Size (in.): | 27 |
| Viewable Area (in.): | 27 |
| Panel Type: | IPS Technology |
| Resolution: | 2560 x 1440 |
| Resolution Type: | QHD (Quad HD) |
| Static Contrast Ratio: | 1,000:1 (typ) |
| Dynamic Contrast Ratio: | 80M:1 |
| Light Source: | LED |
| Brightness: | 350 cd/m ² (typ) |
| Colours: | 16.7M |
| Colour Space Support: | 8 bit true |
| Aspect Ratio: | 16:9 |
| Response Time (Typical GTG): | 5ms |
| Response Time (GTG w/OD): | 5.8ms |
| Viewing Angles: | 178° horizontal, 178° vertical |
| Backlight Life (Hours): | 30000 Hrs (Min) |
| Curvature: | Flat |
| Refresh Rate (Hz): | 60 |
| Blue Light Filter: | Yes |
| Flicker-Free: | Yes |
| Color Gamut: | NTSC: 78% size (Typ) sRGB: 110% size / 100% coverage (Typ) |
| Pixel Size: | 0.233 mm (H) x 0.233 mm (V) |
| Surface Treatment: | Anti-Glare, Hard Coating (3H) |

COMPATIBILITY

| | |
|------------------------|------------------------------------|
| PC Resolution (max): | 2560x1440 |
| Mac® Resolution (max): | 2560x1440 |
| PC Operating System: | Windows 11 certified; macOS tested |
| Mac® Resolution (min): | 2560x1440 |

CONNECTOR

| | |
|---|--------------------------------|
| USB 3.2 Type A Down Stream: | 2 |
| USB 3.2 Type B Up Stream: | 1 |
| USB 3.2 Type C Up Stream; DisplayPort Alt mode : | 1 (90W power charger) |
| HDMI 1.4: | 1 |
| DisplayPort: | 1 |
| DisplayPort Out: | 1 |
| Power in: | 3-pin Socket (IEC C14 / CEE22) |
| Ethernet LAN (RJ45): | 1 |

AUDIO

| | |
|--------------------|-----------|
| Internal Speakers: | 2Watts x2 |
|--------------------|-----------|

POWER

| | |
|------------------------|-----------------------|
| Eco Mode (Conserve): | 16.81W |
| Eco Mode (optimized): | 21.12W |
| Consumption (typical): | 26.35W |
| Consumption (max): | 35.94W |
| Voltage: | AC 100-240V |
| Stand-by: | 0.5W |
| Power Supply: | Internal Power Supply |

ADDITIONAL HARDWARE

| | |
|-----------------------|-----|
| Kensington Lock Slot: | 1 |
| Cable Organization: | Yes |

CONTROLS

| | |
|--------------------|---|
| Physical Controls: | Key 1 (eye), Key 2, Key 3, Key 4, Key 5, Key 6 (power) |
| On Screen Display: | Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu |

OPERATING CONDITIONS

| | |
|----------------------------|-----------------------------|
| Temperature: | 32°F to 104°F (0°C to 40°C) |
| Humidity (non-condensing): | 20% to 90% |

WALL MOUNT

| | |
|------------------|--------------|
| VESA Compatible: | 100 x 100 mm |
|------------------|--------------|

INPUT SIGNAL

| | |
|-----------------------|------------|
| Frequency Horizontal: | 15 ~ 90KHz |
| Frequency Vertical: | 49 ~ 75Hz |

VIDEO INPUT

| | |
|---------------|---|
| Digital Sync: | TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2), Micro-Packet - Type C |
|---------------|---|

ERGONOMICS

| | |
|----------------------|-----------|
| Height Adjust (mm): | 130 |
| Swivel: | 120° |
| Tilt (Forward/Back): | -5° / 40° |
| Pivot (Right/Left): | 90° / 90° |

WEIGHT (IMPERIAL)

| | |
|--------------------------|------|
| Net (lbs): | 15.2 |
| Net Without Stand (lbs): | 9.9 |
| Gross (lbs): | 22.5 |

WEIGHT (METRIC)

| | |
|-------------------------|------|
| Net (kg): | 6.9 |
| Net Without Stand (kg): | 4.5 |
| Gross (kg): | 10.2 |

DIMENSIONS (IMPERIAL) (WXHxD)

| | |
|-------------------------------|------------------------|
| Packaging (in.): | 27.2 x 16.9 x 8.6 |
| Physical (in.): | 24.1 x 15.99~20.99 x 8 |
| Physical Without Stand (in.): | 24.1 x 14.2 x 2 |

DIMENSIONS (METRIC) (WXHxD)

| | |
|------------------------------|---------------------------|
| Packaging (mm): | 692 x 430 x 218 |
| Physical (mm): | 612 x 406.19~533.24 x 202 |
| Physical Without Stand (mm): | 612 x 362 x 52 |

GENERAL

| | |
|-------------------|--|
| Regulations: | cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, TCO 9.0, EAC, UkrSEPRO, UKCA, RCM |
| PACKAGE CONTENTS: | VG2756-2K x1, 3-pin Plug (IEC C13 / CEE22) x1, DisplayPort Cable (v1.2; Male-Male) x1, USB Type-C Cable (Male-Male) x1, USB A/B Cable (v3.2; Male-Male) x1, Quick Start Guide x1 |
| Recycle/Disposal: | Please dispose of in accordance with local, state or federal laws. |
| Warranty: | *Warranty offered may differ from market to market |
| Power Management: | Energy Star standards, EPEAT |