



LCD DISPLAY

VX3276-2K-MHD-2


Key Features

- SuperClear® IPS panel for vivid picture quality and wider viewing angles
- Frameless bezel and stylish stand
- QHD (2560 x 1440) resolution for crisp, clear image detail
- Adaptive Sync delivers smooth, continuous visuals
- Flexible connectivity with DisplayPort, Mini DisplayPort and two HDMI ports



Product Description

The ViewSonic VX3276-2K-mhd-2 is the perfect blend of style and performance with features that include a sizeable 32" frameless bezel, a minimalist design, and QHD (2560 x 1440) resolution. Design features such as an ultra-slim profile, metallic silver triangle stand, and a sleek edge-to-edge frameless bezel give the monitor a premium feel that fits nicely both at home and in the office. VX3276-2K-mhd-2 leverages a SuperClear® IPS panel and rich 10-bit colour to produce an extensive array of vibrant colours with wide viewing angles. What's more, this monitor is integrated with dual 2-watt stereo speakers, while DisplayPort, Mini DP, and 2 HDMI ports offer flexible connectivity options for both general usage and gaming.

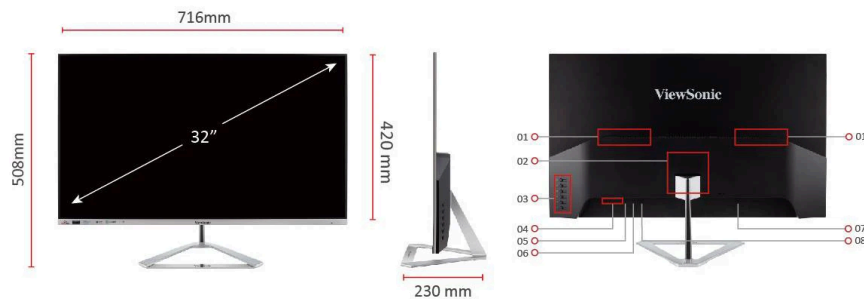

1. Internal Speakers
2. VESA Compatible(Wall Mount 100 x 100mm)
3. Menu Controls
4. HDMI x 2
5. Mini Displayport
6. Displayport

7. DC in
8. Earphone



Visit Us

www.viewsonic.com



DISPLAY

| | |
|-----------------------------------|---|
| Display Size (in.): | 32 |
| Viewable Area (in.): | 31.5 |
| Panel Type: | IPS Technology |
| Resolution: | 2560 x 1440 |
| Resolution Type: | QHD (Quad HD) |
| Static Contrast Ratio: | 1,200:1 (typ) |
| Dynamic Contrast Ratio: | 80M:1 |
| Light Source: | LED |
| Brightness: | 250 cd/m ² (typ) |
| Colors: | 1.07B |
| Color Space Support: | 10 bit (8 bit + FRC) |
| Aspect Ratio: | 16:9 |
| Response Time (Typical GTG): | 4ms |
| Viewing Angles: | 178° horizontal, 178° vertical |
| Backlight Life (Hours): | 30000 Hrs (Min) |
| Curvature: | Flat |
| Refresh Rate (Hz): | 75 |
| Variable Refresh Rate Technology: | Yes |
| Blue Light Filter: | Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu |
| Flicker-Free: | HDR10 |
| Color Gamut: | NTSC: 72% size (Typ) sRGB: 103% size (Typ) |
| Pixel Size: | 0.273 mm (H) x 0.273 mm (V) |
| Surface Treatment: | Anti-Glare, Hard Coating (3H) |

COMPATIBILITY

| | |
|------------------------|-----------|
| PC Resolution (max): | 2560x1440 |
| Mac® Resolution (max): | 2560x1440 |
| PC Operating System: | 48~75Hz |
| Mac® Resolution (min): | 2560x1440 |

CONNECTOR

| | |
|-------------------|----------|
| 3.5mm Audio Out: | 1 |
| HDMI 1.4: | 2 |
| DisplayPort: | 1 |
| Mini DisplayPort: | 1 |
| Power in: | 50/60 Hz |

AUDIO

| | |
|--------------------|-----------|
| Internal Speakers: | 2Watts x2 |
|--------------------|-----------|

POWER

| | |
|------------------------|-----------------------------|
| Eco Mode (Conserve): | 41W |
| Eco Mode (optimized): | 43W |
| Consumption (typical): | 46W |
| Consumption (max): | 37W |
| Voltage: | Internal Power Supply AC |
| Stand-by: | 36W |
| Power Supply: | 12 |

CONTROLS

| | |
|--------------------|--|
| Physical Controls: | 70000 |
| On Screen Display: | Key 1 (game mode), Key 2, Key 3, Key 4, Key 5, Key 6 (power) |

OPERATING CONDITIONS

| | |
|----------------------------|-----------------------------|
| Temperature: | 32°F to 104°F (0°C to 40°C) |
| Humidity (non-condensing): | 20% to 90% |

INPUT SIGNAL

| | |
|-----------------------|---|
| Frequency Horizontal: | HDMI (v1.4): 15 ~ 113KHz, DisplayPort (v1.4): 24 ~ 113KHz, mini DisplayPort (v1.4): 24 ~ 113KHz |
| Frequency Vertical: | HDMI (v1.4): 24 ~ 75Hz, DisplayPort (v1.4): 48 ~ 75Hz, mini DisplayPort (v1.4): 48 ~ 75Hz |

VIDEO INPUT

| | |
|---------------|---|
| Digital Sync: | TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.4), PCI-E - mini DisplayPort (v1.4) |
|---------------|---|

ERGONOMICS

| | |
|----------------------|-------------|
| Swivel: | 15° |
| Tilt (Forward/Back): | Matt° / -4° |
| Pivot (Right/Left): | 0° / 0° |

WEIGHT (IMPERIAL)

| | |
|--------------------------|------|
| Net (lbs): | 13.7 |
| Net Without Stand (lbs): | 12.3 |
| Gross (lbs): | 18.1 |

WEIGHT (METRIC)

| | |
|-------------------------|-----|
| Net (kg): | 6.2 |
| Net Without Stand (kg): | 5.6 |
| Gross (kg): | 8.2 |

DIMENSIONS (IMPERIAL) (WXHxD)

| | |
|-------------------------------|-------------------|
| Packaging (in.): | 31.7 x 20 x 4.3 |
| Physical (in.): | 28.1 x 19.8 x 9.1 |
| Physical Without Stand (in.): | 28.1 x 16.4 x 1.5 |

DIMENSIONS (METRIC) (WXHxD)

| | |
|------------------------------|-----------------|
| Packaging (mm): | 806 x 509 x 109 |
| Physical (mm): | 713 x 504 x 230 |
| Physical Without Stand (mm): | 713 x 416 x 38 |

GENERAL

| | |
|--------------|---|
| Regulations: | CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, KC, K-MEPS, BIS |
|--------------|---|

| | |
|-------------------|--|
| PACKAGE CONTENTS: | VX3276-2K-MHD-2 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, Quick Start Guide x1 |
|-------------------|--|

| | |
|-------------------|--|
| Recycle/Disposal: | Please dispose of in accordance with local, state or federal laws. |
|-------------------|--|

| | |
|-----------|--|
| Warranty: | *Warranty offered may differ from market to market |
|-----------|--|

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.

